


FL-100

Multiple I/O

Digital Input: 2, Digital Output: 2, Analog Input: 1,
1-RPM, 1-Wire, 1 RS232/RS485(Optional)

GNSS & GPS Antenna

Internal High Gain Antenna

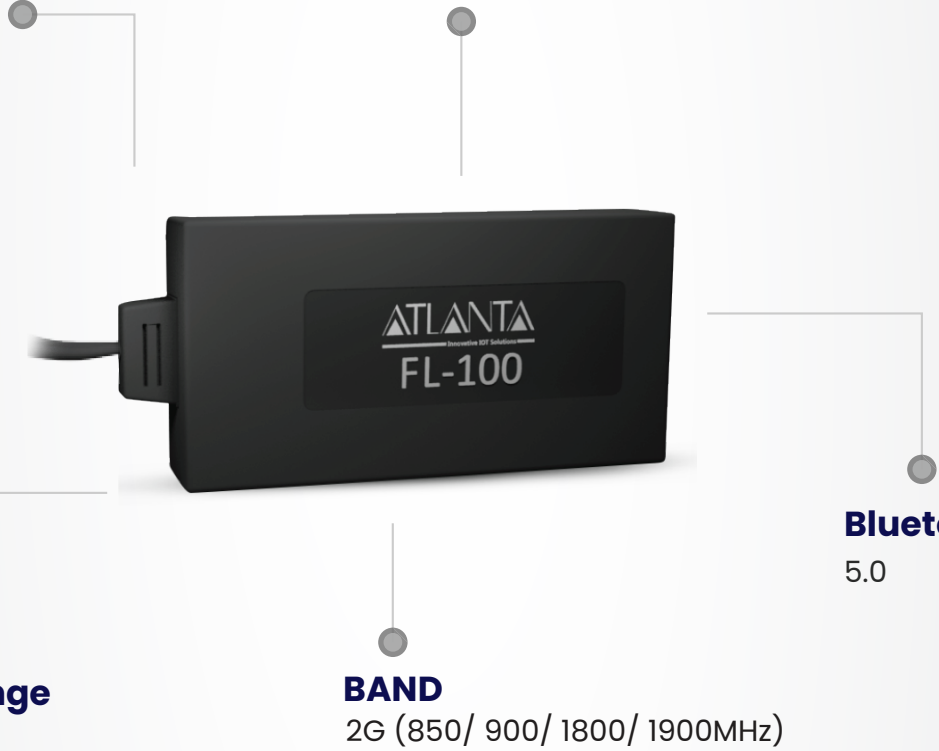

Voltage Range

9-90V DC

BAND

2G (850/ 900/ 1800/ 1900MHz)

Bluetooth

5.0

- FL-100 is a smart vehicle tracker with bluetooth connectivity.
- Multiple I/O's caters to industry like Logistics, Insurance Telematics, Refrigerated Trucks, Rental Cars & many more.
- Remote Data logging when there is no GSM.

ATLANTA SYSTEMS PVT. LTD.

+91 9990333888 / +91-11-49039700(100 Lines)  enquiry@atlantasy.com  www.atlantasy.com

 M-135, 2nd Floor, Connaught Place, New Delhi - 110001

Telematics | IOT and Industrial IOT | Electric Vehicle Solutions | ADAS & DMS Solutions | Smart City Solutions

Key Features

I/Os	Digital Input: 2, Digital Output: 2, Analog Input: 1, 1-RPM, 1-Wire, 1 RS232/RS485(Optional)
GNSS & GPS Antenna	Internal High Gain Antenna
Indicators	3 LED's (Power, GSM, GPS)
USB	2.0 Micro USB
SIM	Micro SIM
Memory	32Mb
Bluetooth	5.0

Power

Voltage Range	9-90V DC
Battery	120mAh Li-Po 3.7V

Navigation

GNSS	GPS, BeiDou, GLONASS
Channels	22 Tracking/ 66 Acquisition Channel
Horizontal Position Autonomous	< 2.5m
SBAS	Supported
2 DRMS, Vertical	± 5m
Tracking Sensitivity	-161dBm
Re acquisition Sensitivity	-146dBm
Velocity	< 0.1m/s
Hot Start	< 1sec
Warm Start	< 30sec
Cold Start	< 35sec

Cellular Network

Band	2G (850/ 900/ 1800/ 1900MHz)
RF Power	Class 4 (2W@850/900 MHz), Class 1 (1W@1800/1900 MHz)
Coding Schemes	CS 1, 2, 3, 4
SMS	Point to Point MO & MT, SMS Cell Broadcast

Operating Environment

Working Current	Sleep Mode <25mA, Active Mode <200mA
Operating Temperature	-30°C to +70°C
Humidity	5% to 95% non-condensing at +40°C

ATLANTA SYSTEMS PVT. LTD.

 +91 9990333888 / +91-11-49039700(100 Lines)  enquiry@atlantasy.com  www.atlantasy.com

 M-135, 2nd Floor, Connaught Place, New Delhi - 110001

Telematics | IOT and Industrial IOT | Electric Vehicle Solutions | ADAS & DMS Solutions | Smart City Solutions